


# FracNow™ SAFlex™

**80% fewer connections, leading to 50% faster rig up and eliminating iron management**

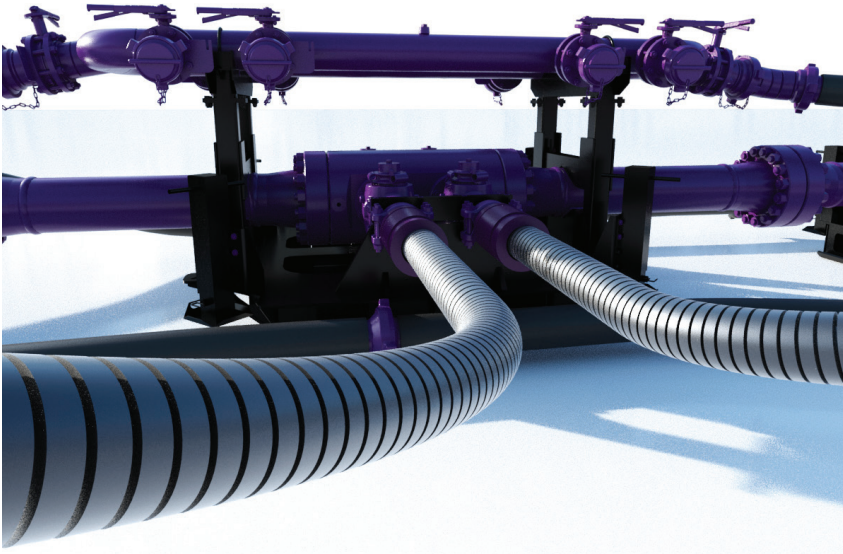

Providing OEM high-pressure flexibles to the oil and gas industry since 1979, the FracNow™ SAFlex™ onshore flexible portfolio enhances completion project economics. Offered in both small and large bore sizes, SAFlex flowlines deliver higher flow rates, improving slurry delivery while reducing connections, operational costs, and downtime. Abrasion and corrosion resistant, SAFlex™ offers flexibility in rig ups, significantly absorbs vibration, and reduces head loss and turbulence.

## Why use the FracNow™ SAFlex™?



- ▶ Erosion and corrosion resistant liners
- ▶ High flow rate flexibles that lock in place while pressurized
- ▶ Dissipation of pump cavitation and system vibration



- ▶ Faster rig ups by reducing connections and multiple lifts
- ▶ Hammer union removal
- ▶ Improved flow rates



- ▶ Simplifies by improving missile and zipper placement
- ▶ Facilitates proper connection makeup
- ▶ Removes fatigue

## System Features:

3-inch, 4-inch, 5-inch and 5.5-inch 15,000 psi, robust end fitting with proprietary sealing technology, armor sheathing, visual inspection for wear, market leader in weight per foot

SAFlex™ Portfolio	3" PumpFlex	4" WellFlex	5" WellFlex	5.5" WellFlex
<b>Length</b>	20 ft	24 ft	25 ft	25 ft
<b>Flowrate (max)</b>	21 bpm	60 bpm	110 bpm	135 bpm
<b>End Connections</b>	Clamp (C-Hub)	4in-15K FLG	Clamp (5-Hub)	Clamp (5.5-Hub)
<b>MBR (in service)</b>	2.3 ft	3.5 ft	4.5 ft	4.5 ft
<b>Pressure - Design</b>	15.0 ksi	15.0 ksi	15.0 ksi	15.0 ksi
<b>Weight (empty)</b>	27.6 lbs/ft	58.3 lbs/ft	67.3 lbs/ft	72.0 lbs/ft


 To purchase or get more information, contact your TechnipFMC sales representative, email [Surface.INTLSales@TechnipFMC.com](mailto:Surface.INTLSales@TechnipFMC.com) or call **+1 800 772 8582**

TechnipFMC  
 13460 Lockwood Rd  
 Houston, Texas 77044 USA  
 Tel.: +1 281 591 4000

**TechnipFMC.com**