

DrillNow™

Drill Time Optimization (DTO)

Delivering Superior Service. Wellhead experts since 1930

Realize increased reliability and productive time, on the pad, with our DTO wellhead system.

The DTO wellhead features quick connect technology on Riser, BOP, and Tubing Head connections increasing productive time and enhancing safety on the pad. The DTO wellhead system is optimized for Surface by Production casing well designs and is configurable to accept a second surface string without nipple down of the riser system.




Speed

- ▶ Saves up to 30 hours of rig time
- ▶ BOP, Riser, and Tubing Head Quick Connectors
- ▶ Offline Cementing tools available
- ▶ Offline BOP test tools available




Operational Performance

- ▶ Field proven performance
- ▶ Detailed installation procedures
- ▶ Experienced service personnel




Versatility

- ▶ Surface Casing installed through riser or rotary table
- ▶ Ability to rotate production casing hanger
- ▶ Drill for liner without BOP break
- ▶ Up to two surface casing strings



Applications

- ▶ 11" and 13 5/8" BOP
- ▶ Surface Casing - 7 5/8" -9 5/8"
- ▶ Production Casing- 4 1/2" -7"
- ▶ Drilling Pressures- 5K
- ▶ Completion Pressures-5K & 10K

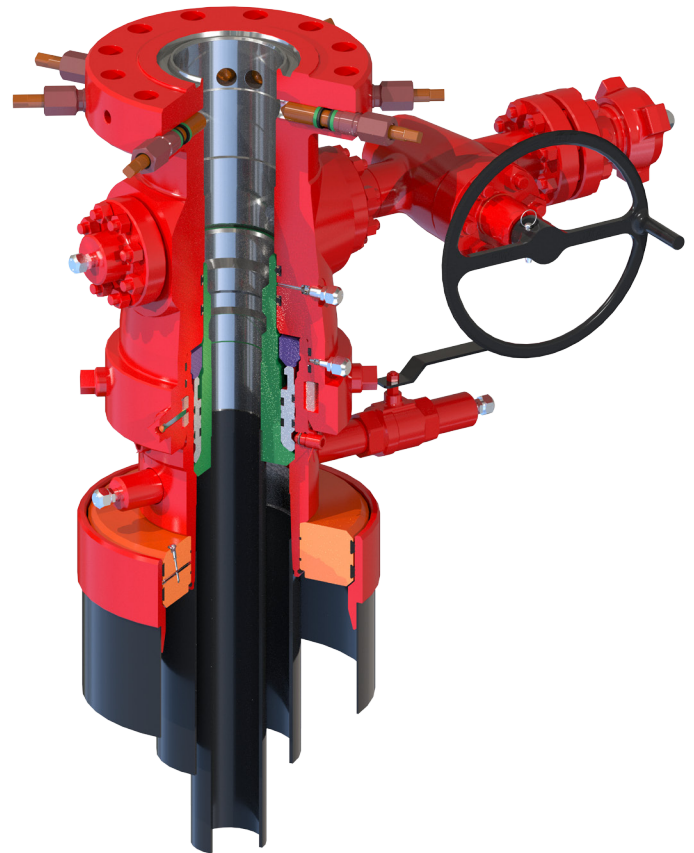

Safety

- ▶ Eliminates work below suspended loads
- ▶ Reduced wellhead penetrations
- ▶ BPV profile on production hanger

> To purchase or get more information, contact your TechnipFMC sales representative or email infoSA@TechnipFMC.com

TechnipFMC
13460 Lockwood Rd.
Houston, Texas 77044 USA
Tel.: +1 281 591 4000

TechnipFMC.com